

Model 2014 & 2015

1½" to 2"

DN40 to DN50



Three-Way Thermostatic Valves

Compact and Reliable Temperature Control


Fluid Power Energy (FPE) thermostatic valves utilize the principle of expanding wax, which in the semi-liquid state undergoes large expansion rates within a relatively narrow temperature range. The self-contained element activates a stainless steel sleeve, which directs flow. All FPE thermostatic valves are factory set at predetermined temperatures: no further adjustments are necessary.

When used in a diverting application, on start-up the total fluid flow is routed back to the main system. As fluid temperature rises to the control range, some fluid is diverted to the cooling system. As fluid temperature continues to increase, more flow is diverted. When the thermostat is in a fully stroked condition, all fluid flow is directed to the cooling system.

FPE thermostatic valves may also be used in a mixing application. Hot fluid enters the "B" port and colder fluid enters the "C" port. The flows mix and the thermostat adjusts flow through ports "B" and "C" to reach the desired temperature, exiting the "A" port.

Standard FPE thermostatic valve housings are made from aluminum and grey iron castings, however, ductile iron, bronze, steel and stainless steel housings are available.

Additional BSP, SAE and JIS threads available.

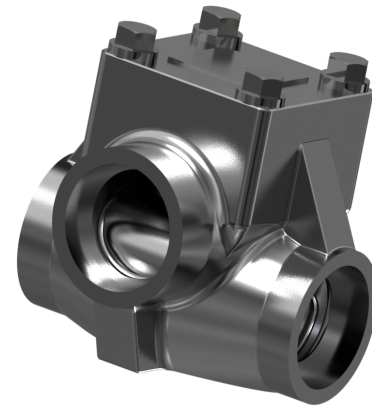

Including:

S2014-1	1½" Socket Weld Connection
S2014	2" Socket Weld Connection
S2015-1	1½" Socket Weld Connection
S2015	2" Socket Weld Connection
S2014-X16	2" Butt Weld Connection
S2015-X16	2" Butt Weld Connection

Features and Benefits

- Wide range of temperatures
- Heavy duty
- Self-contained
- Replaceable element
- Non-adjustable
- Rugged construction
- Tamper-proof
- Operate in any orientation
- Compact

www.FPEvalves.com

EUROPE, MIDDLE EAST,
AFRICA, ASIA + PACIFIC
+44 1733 206 678
emeaap@FPEvalves.com

AMERICAS
+1 262 548 6220
americas@FPEvalves.com


CHINA
+86 0519 8158 0102
china@FPEvalves.com

Model 2014 & 2015 Three-Way Thermostatic Valve Specifications

All units in inches (mm) or lbs (Kg); English (metric)

Model Number	Body Material*	Connection Size	Principal Dimensions Units					No. of elements
			X	Y	W	Z	V	
*2014-1 *2015-1	S	1½" SOCKET WELD	4 15/16 (125)	3 13/16 (96)	6 7/16 (163)	5 13/16 (147)	5 15/16 (150)	1
*2014 *2015	S	2" SOCKET WELD	4 15/16 (125)	3 13/16 (96)	6 7/16 (163)	5 13/16 (147)	5 15/16 (150)	1
*2014-X16 *2015-X16	S	2" BUTT WELD	4 15/16 (125)	3 13/16 (96)	6 7/16 (163)	5 13/16 (147)	5 15/16 (150)	1


Replace * with body material type: S = Steel

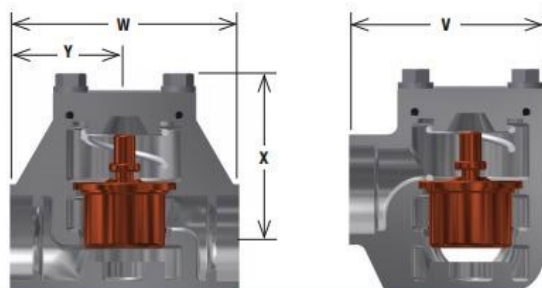


Pressure ratings @ 250°F		Weight
Material	S	S
psi	500	20 (9)
Bar	34.4	

Service Kits (xxx represents temperature °F)				
Model	O-Ring	Gasket	LipSeal	Thermostat
2400-xxx	1 of Buna-N	1	1	1
2400V-xxx	1 of Viton	1	1	1
2400E-xxx	1 of Neoprene	1	1	1

Lip Seal Insertion Tools		Lip Seal Extraction Tools	
Part Number	Component	Part Number	Component
2071-IT	Lip Seal Insertion Plug	2071-RT	Lip Seal Extraction Plug

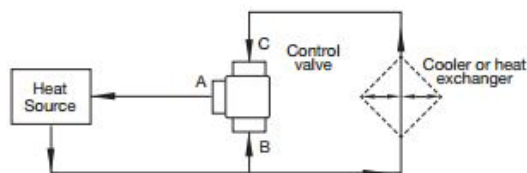

Mixing system

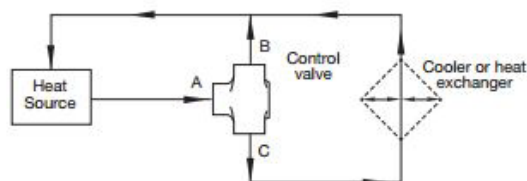

Diverting system

NOTE: Service Kits are supplied with Housing O-Rings & Housing Gaskets. Make sure to replace your original housing seal using the same style seal, and discard the extra component. If your valve was originally supplied with a gasket, DO NOT attempt to use an O-Ring, as the seal will leak without a groove to accept the O-Ring

Note: FPE reserves the right to substitute ordered material for better quality.

www.FPEvalves.com

EUROPE, MIDDLE EAST,
AFRICA, ASIA + PACIFIC
+44 1733 206 678
emeap@FPEvalves.com

AMERICAS
+1 262 548 6220
americas@FPEvalves.com

CHINA
+86 0519 8158 0102
china@FPEvalves.com